
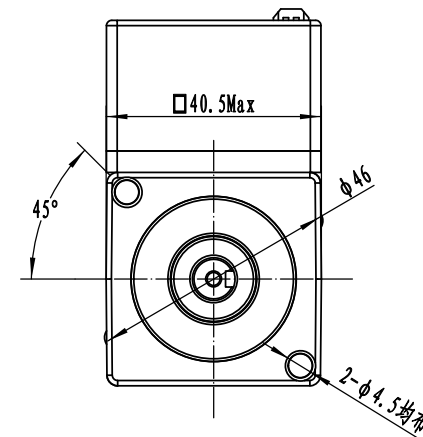
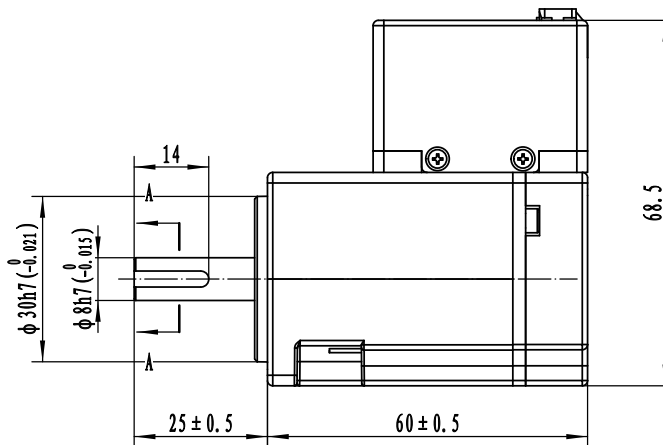


02.A045.000833

Key: 3x3x14

A-A






技术规格:

额定电压 (V)	48 DC
额定功率 (W)	104
转子极对数 (p)	7
额定力矩 (N·m)	0.33
瞬时最大力矩 (N·m)	0.99
额定转速/最大转速 (rpm)	3000/6000
额定电流 (A (rms))	4.1±10%
瞬时最大电流 (A (rms))	12.3±10%
力矩系数 (N·m/A (rms))	0.08±10%
反电势系数 (×10 ⁻³ V/rpm)	5.1±10%
电阻 (Ω)	0.89±10% (20℃)
电感 (mH)	0.402±20% (20℃)
转动惯量 (×10 ⁻⁴ kg·m ²)	0.045±10%
最大径向负载 (N)	68
最大轴向负载 (N)	50
重量 (kg)	TBD±10%
保护结构	/
绝缘等级	F
绝缘电阻	>20MΩ DC500V
绝缘耐压	800VAC/1s/5mA

电源接口定义

1	2
48V+	48V-

I/O接口

18	16	14	12	10	8	6	4	2	1	2	3	4	1	2	3	4
DI1	SWDIO	GND	DI3		OUT1+	485A+			IN TX+	IN RX+	IN TX-	IN RX-	OUT TX+	OUT RX+	OUT TX-	OUT RX-
17	15	13	11	9	7	5	3	1	母头 				母头 			
DI2	SWCLK	COMI			COMO	485B										
																
MOLEX 430201800																
A向																